



MILTECH™ 2022

Compact Military Ethernet to Serial, GPIO Unit

The MILTECH™ 2022 is a MIL-STD rugged, compact military-grade Ethernet to Serial/Discrete IO Terminal Server with support in USB to Serial and USB to Ethernet working modes as well. Developed for portable military and harsh environment applications, the MILTECH 2022 features mechanical packaging enhancements designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. The unit has been specially hardened to improve ingress, impact, and shock/vibration protection, as well as eliminate all moving parts through passive cooling. Interface through sealed MIL-STD circular connectors, with 24VDC power, makes it instantly compatible with network devices and power systems. Compact in size, the MILTECH 2022 is particularly useful for expanding Serial port density and discrete IO, in space-constrained airborne and ground vehicle environments while providing a new security layer for serial interfaces.

MILTECH 2022 has four main operation modes, Serial Terminal Server mode, Serial/Discrete IO Bridge mode, USB to RS232/RS422/RS485 mode and USB to Ethernet mode. In Serial Terminal Server Mode, the remote equipment manages several serial and IO devices connected directly to MILTECH 2022. Serial/Discrete IO mode allows bridging serial (RS232/RS422/RS485) communications and/or Discrete IOs via two back-to-back MT2022 units.

MILTECH 2022 serves as a robust commercial off-the-shelf (COTS) solution for rugged Serial, Discrete IO connectivity, which can be used in a wide range of military and commercial applications, including:

- UAVs
- Land autonomous vehicles (UGVs)
- Robots
- Mobile equipment fielded in harsh environments

Modern platforms contain dozens of legacy serial devices that must be interconnected to the new computerized network. MILTECH 2022 is an ideal solution for secure mobile Serial-equipped platforms. With the best combination of size, weight, power, and cost (SWaP-C) in the industry, it saves valuable real estate for computers, sensors, targeting systems, and other devices that make mobile platforms highly effective.






SPECIFICATIONS


PHYSICAL PORTS:	• 2 x RS422 Full Duplex, RS485 Full Duplex or RS232 (including RTS, CTS) • 1 x RS485 Half Duplex • 1 x 10/100/1000BT Ethernet Port • 2 x Open / Ground GPO and 2 x Open / Ground GPI • 1x USB2.0 application port + 10W Power Delivery 3.0 Charge support • 1 x USB for management
CONNECTORS:	• Power: SCE2-B-76A06-07SN-002 • J1 ETH: SCE2-B-76A07-14SN-001 • J2 USB: SCE2-B-76A07-14SB-001 • J3-4 Serial: SCE2-B-76A07-14SA-001
CHASSIS:	• Low profile rugged machined aluminum • Conductively cooled • Ingress protection against sand, dust and moisture • Anodize Coating, MIL-A-8625, Type II, Class 2
STANDARDS:	• MIL-STD-461E, MIL-STD-810F/G/GM, MIL-STD-1275, MIL-STD-704, IP68
LED INDICATION:	• Per port LED indications: RS232/422/485 - TX, RX, ETH, USB • Status (Built in Self Test)
POWER:	• Power Input: 24VDC Nominal (12-48V), LED Indication • Power Consumption: 5W Max (15W with 10W Power Delivery Charging) • Chassis grounding • MILSTD-1275, MILSTD-704
ELECTROMAGNETIC:	• Exceed MIL-STD-461E Electromagnetic compatibility • Electromagnetic: CE-102, CS-114, CS-115, CS-116, RE-102, RS-103
ENVIRONMENTAL:	• MILSTD-810F/G/GM: • Random vibration (514.5I), Bench Handling (516.6VI) • Air Pressure (500.5I,II), Blowing Rain (506.5I), Immersion (512.5I) • High Temp.(501.5I,II), Low Temp.(502.5I), Humidity (507.5II), • Salt Atmosphere (509.5I), Blowing Dust (510.5I), Loose Cargo Vibration (514.6II) • Wind Analysis • IP68
PHYSICAL:	• Dimensions: 245.4mm(L) x 159.3mm(W) x 75.2mm(H), not including connectors • Dimensions: 9.66"(L) x 6.27"(W) x 2.96~"(H), not including connectors • Weight: 346g
COOLING:	• No Moving Parts. Passive Cooling.
TEMPERATURE:	• Operational: -40°C to +85°C (-40°F to +185°F) Cold Start • Storage: -45°C to +85°C (-49°F to +185°F)




A

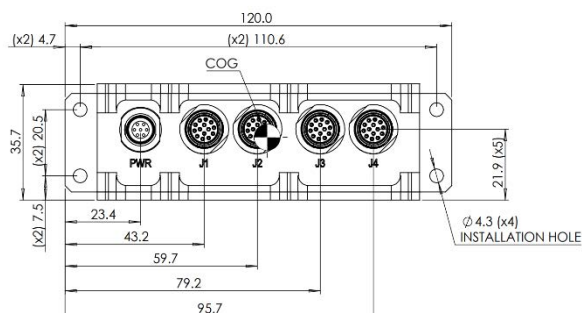


B

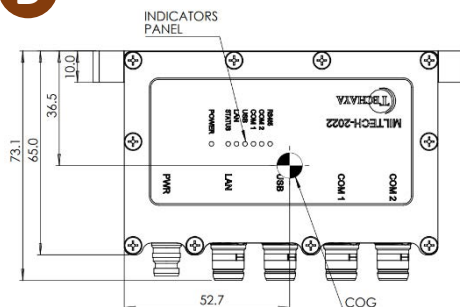

C

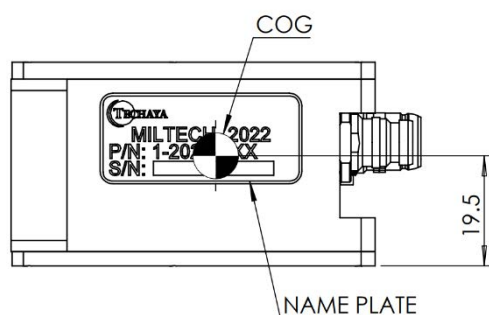

D

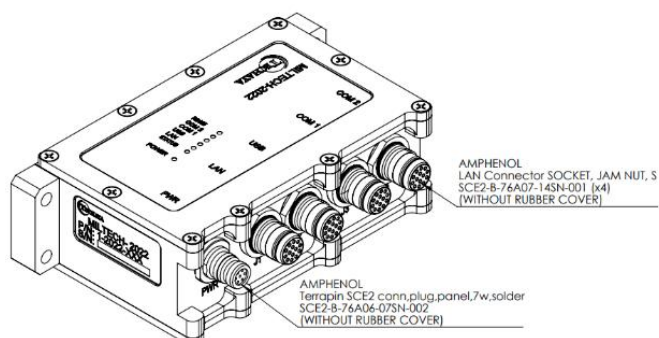

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-2022-000	USB/ETH to Dual Port Serial COM/Discrete IO Transceiver
2-CBL2022PWR	Test HARNESS POWER for MT2022
2-CBL2022LAN	Test HARNESS J1 LAN for MT2022
2-CBL2022USBMNG	Test HARNESS J2 USB/MNG for MT2022
2-CBL2022COM1	Test HARNESS J3 RS232/RS422/RS485 for MT2022
2-CBL2022COM2	Test HARNESS J4 RS232/RS422/RS485 for MT2022
2-CBL2022PLUG232	Test HARNESS J3/J4 - RS232 PLUG for MT2022