

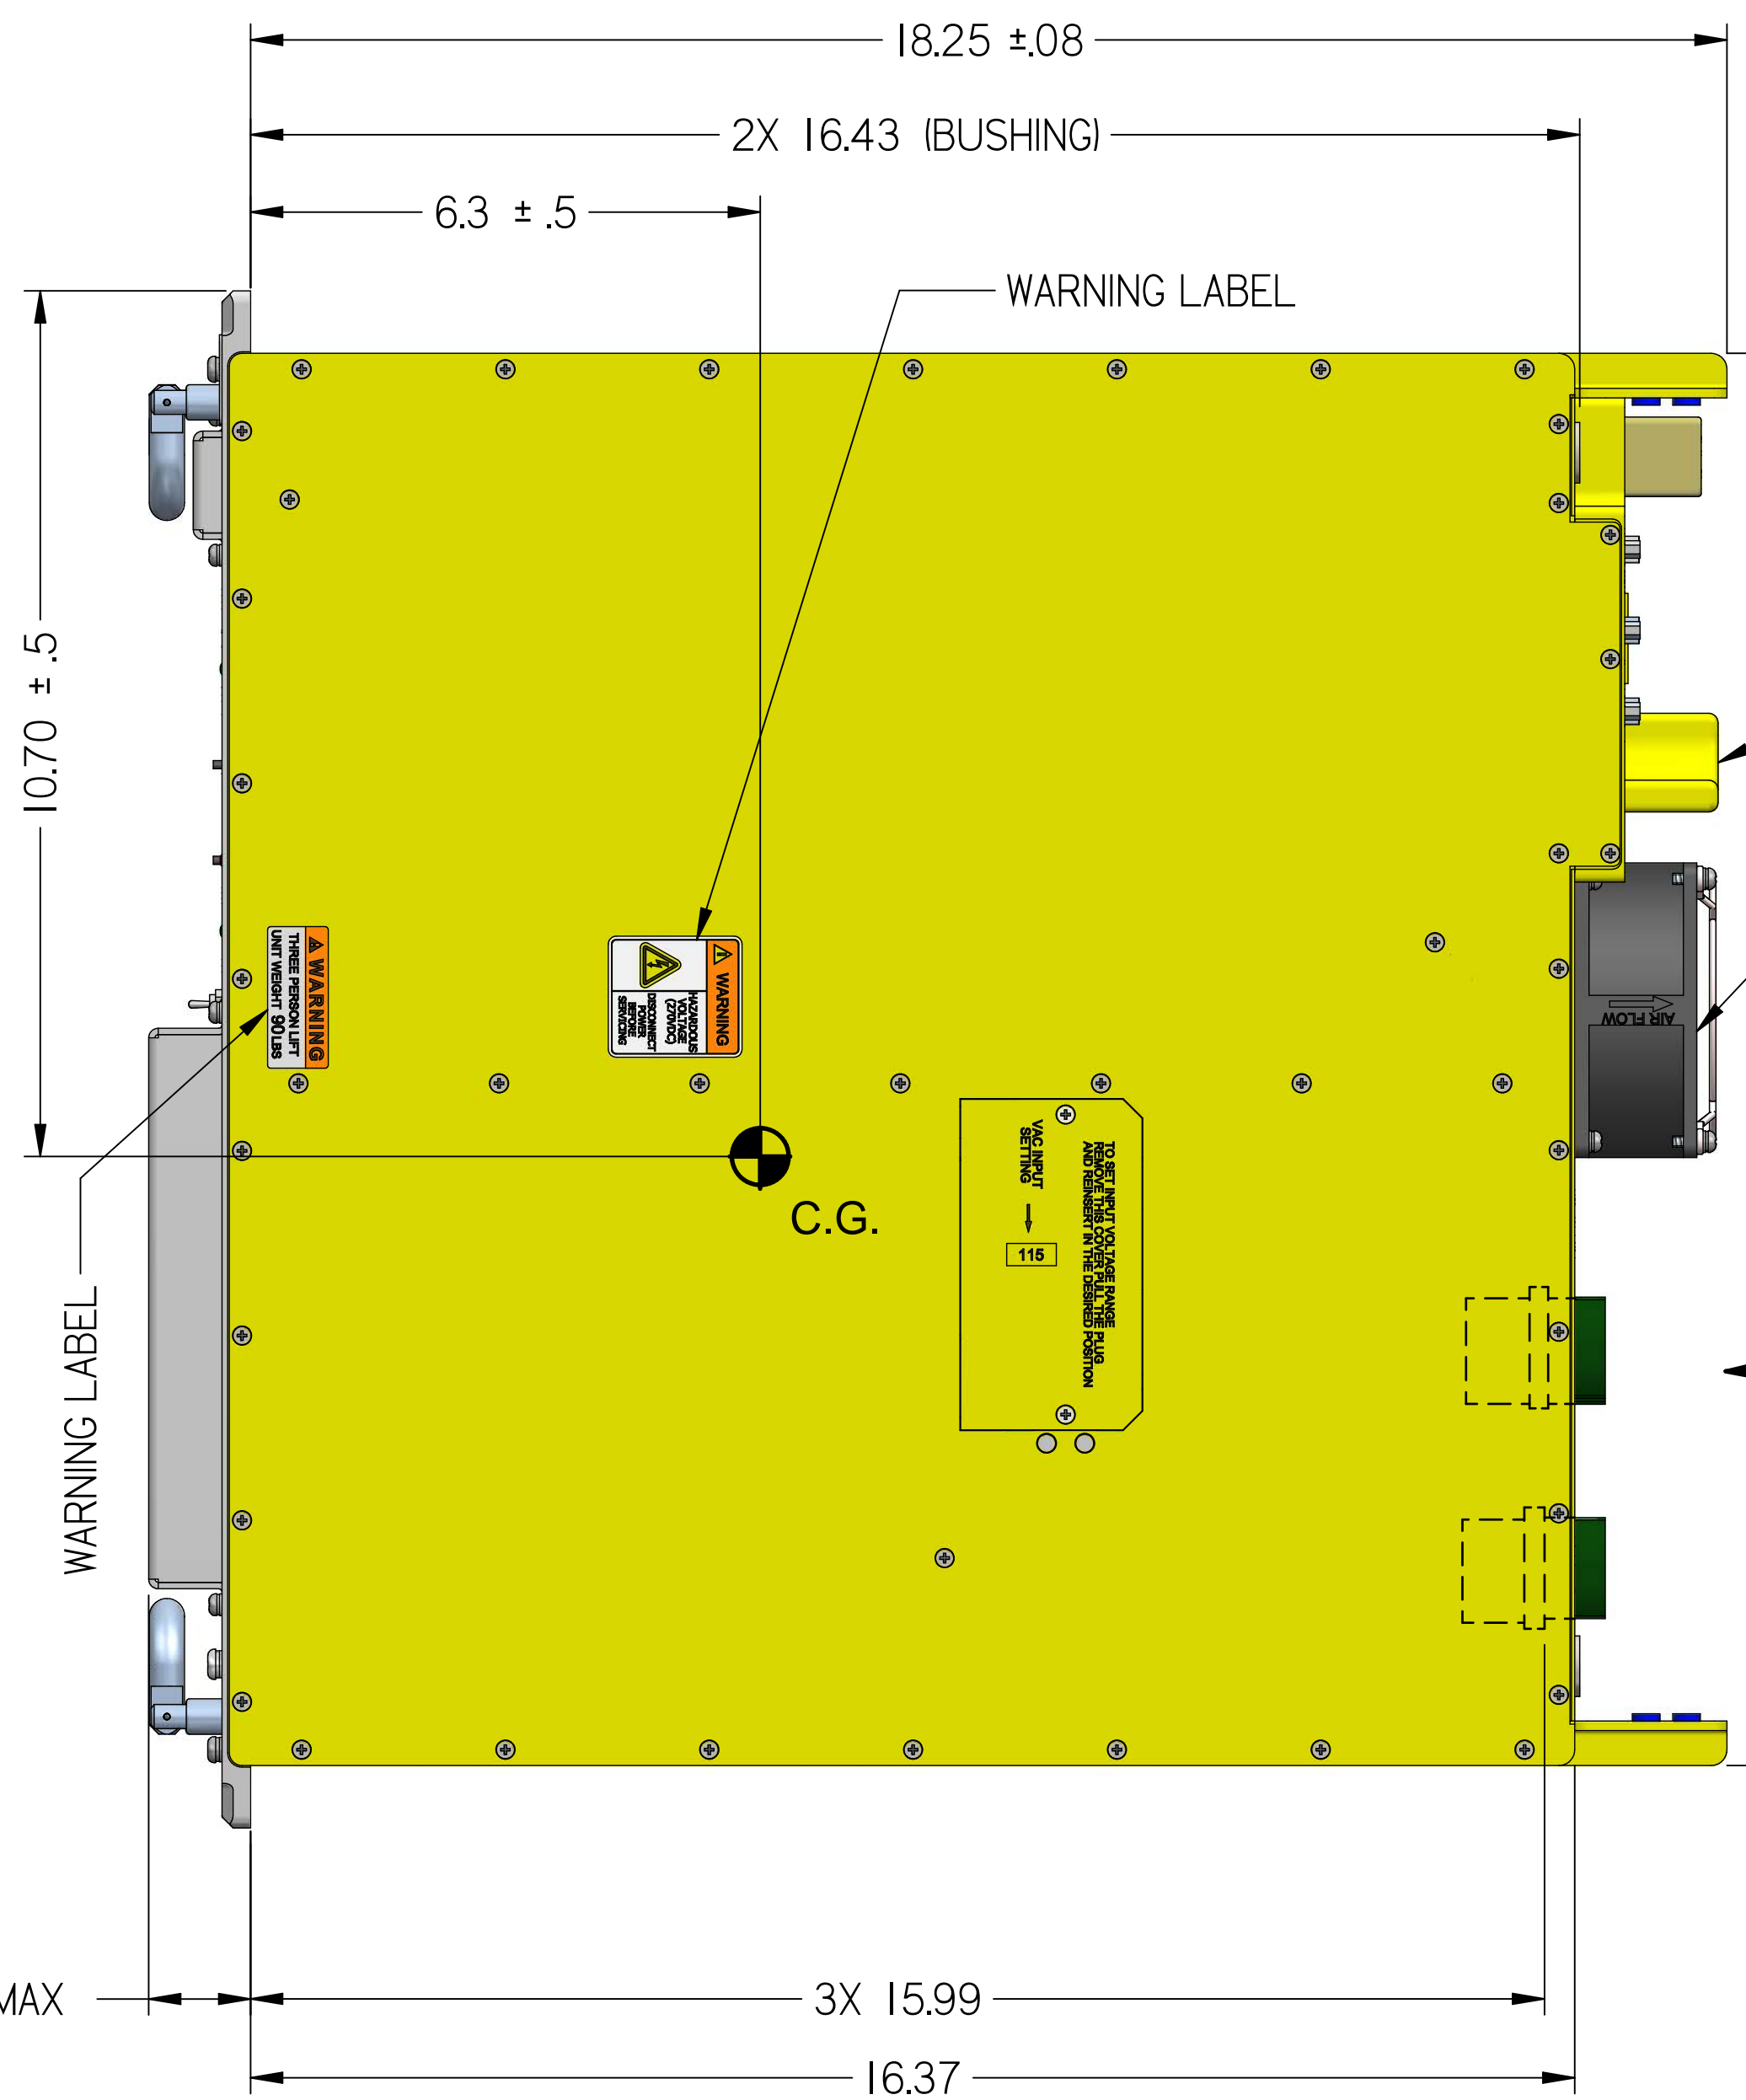
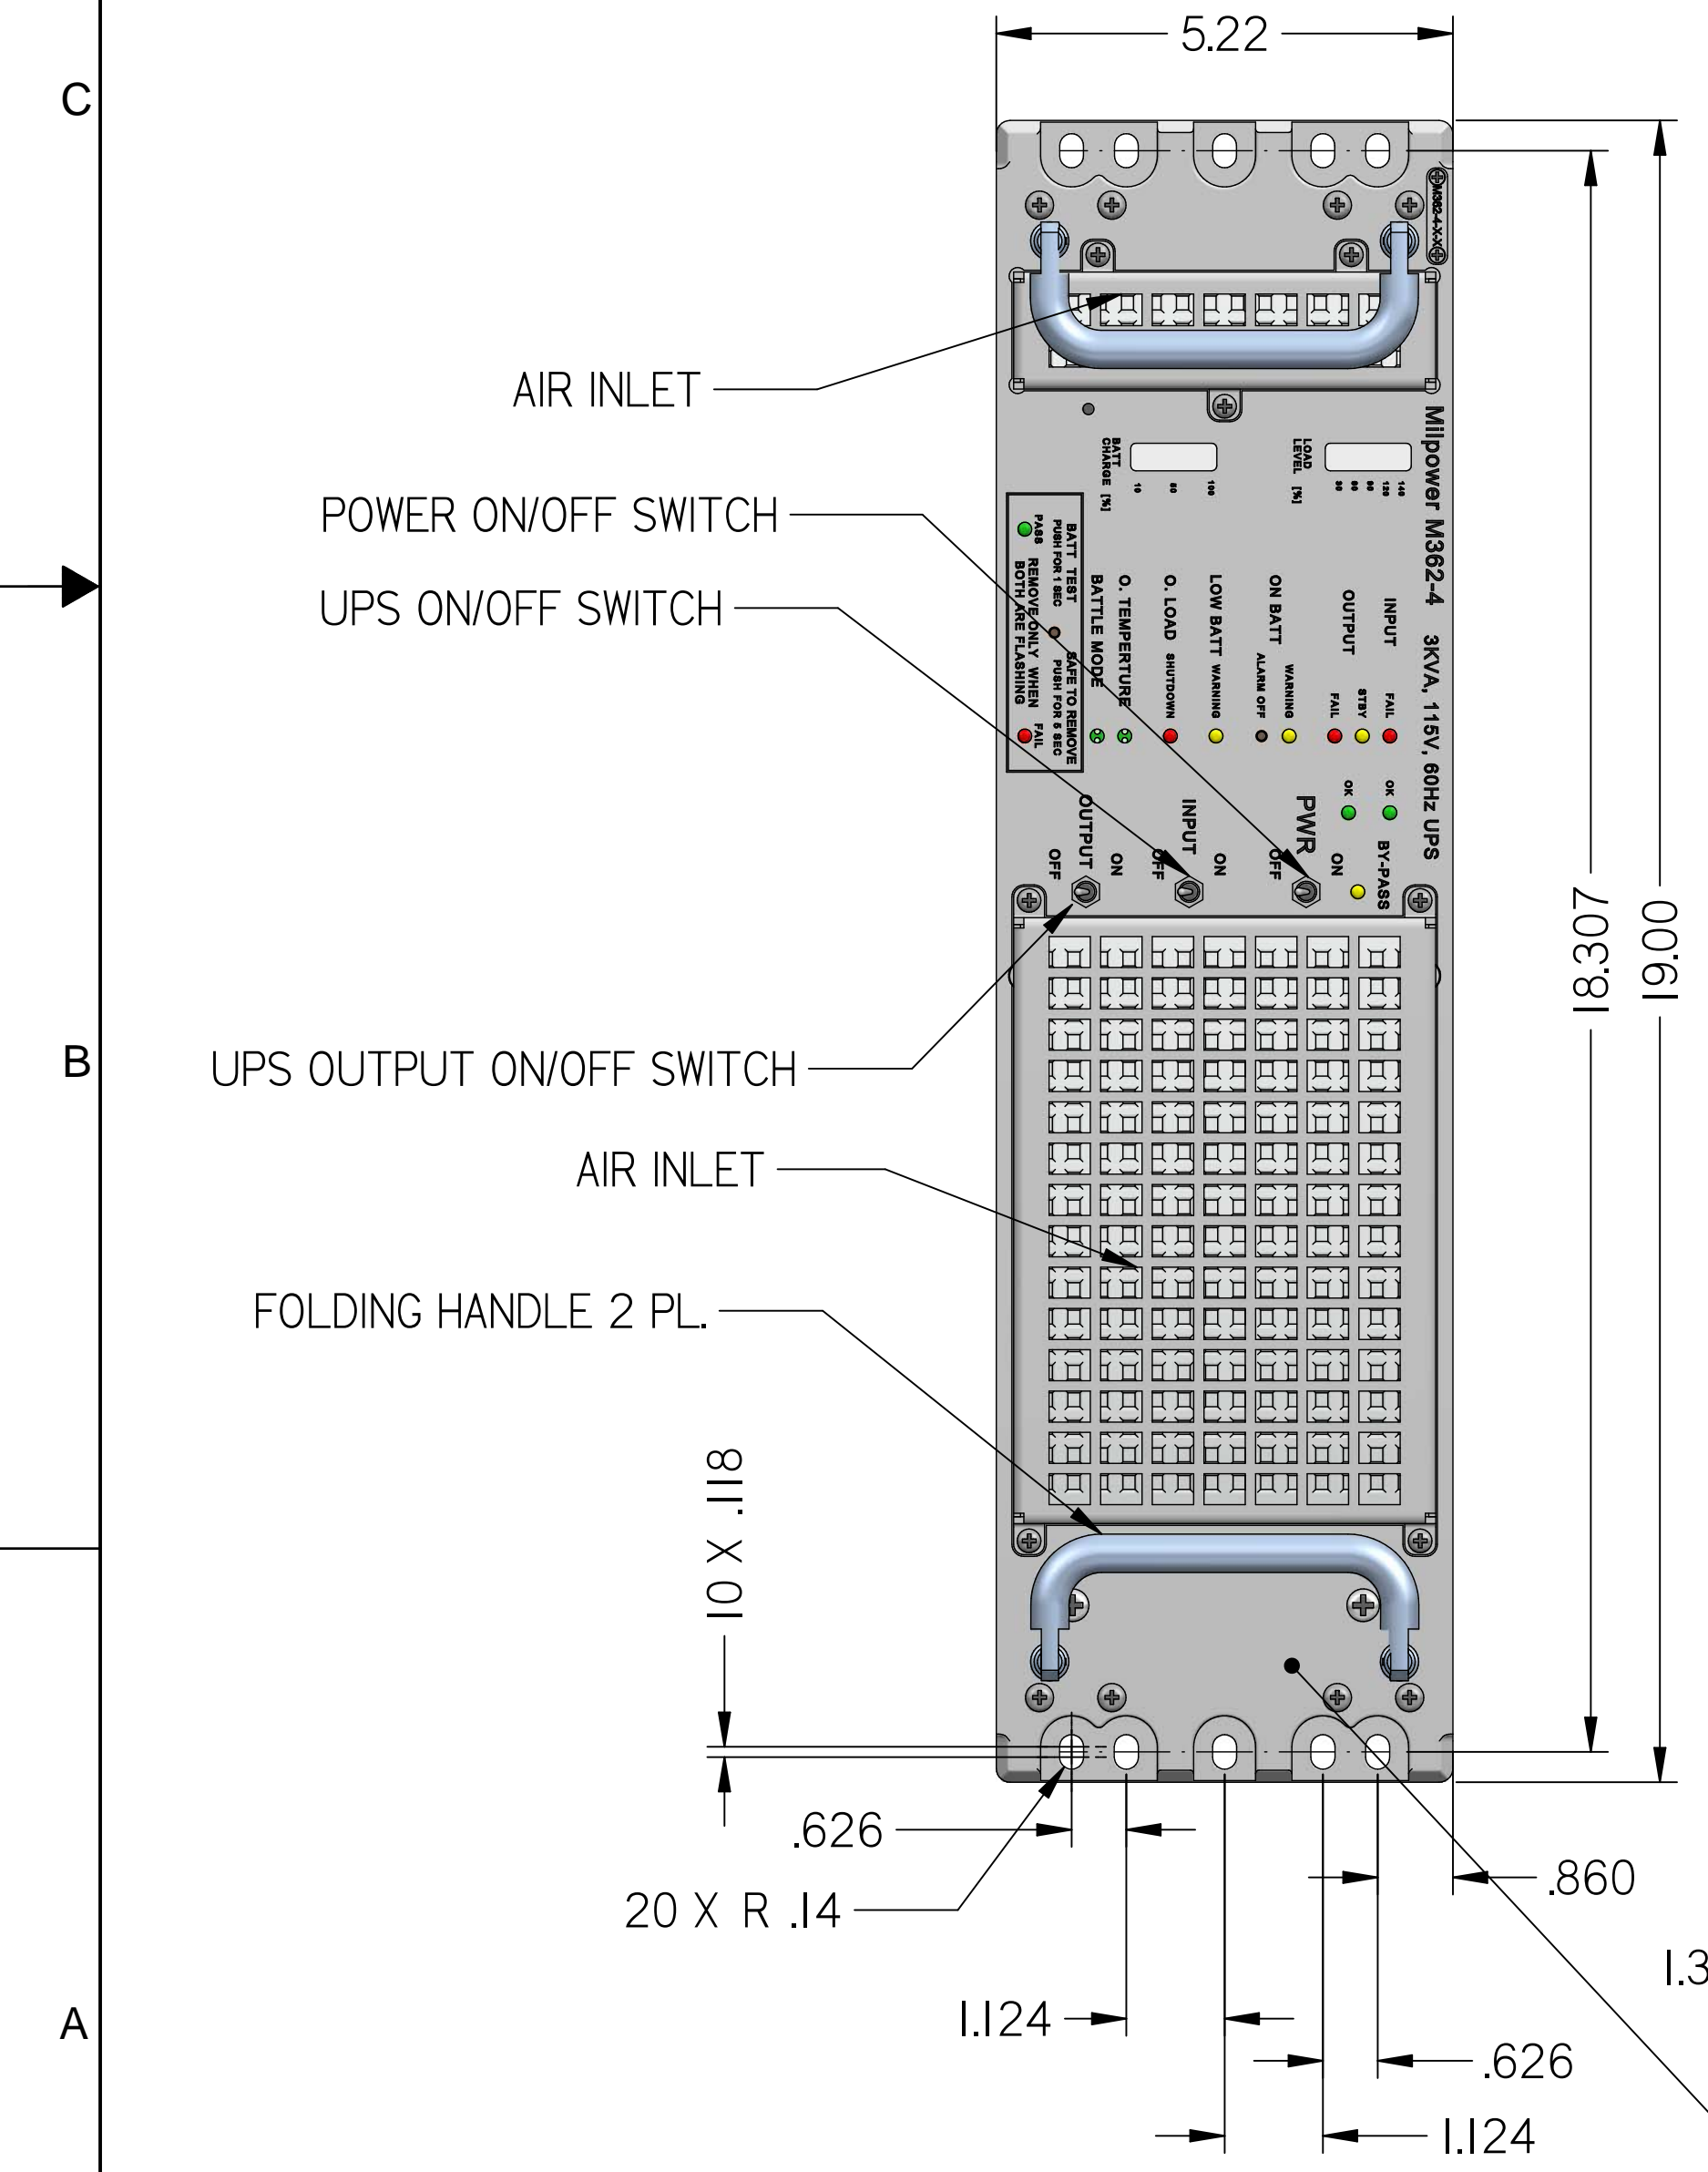
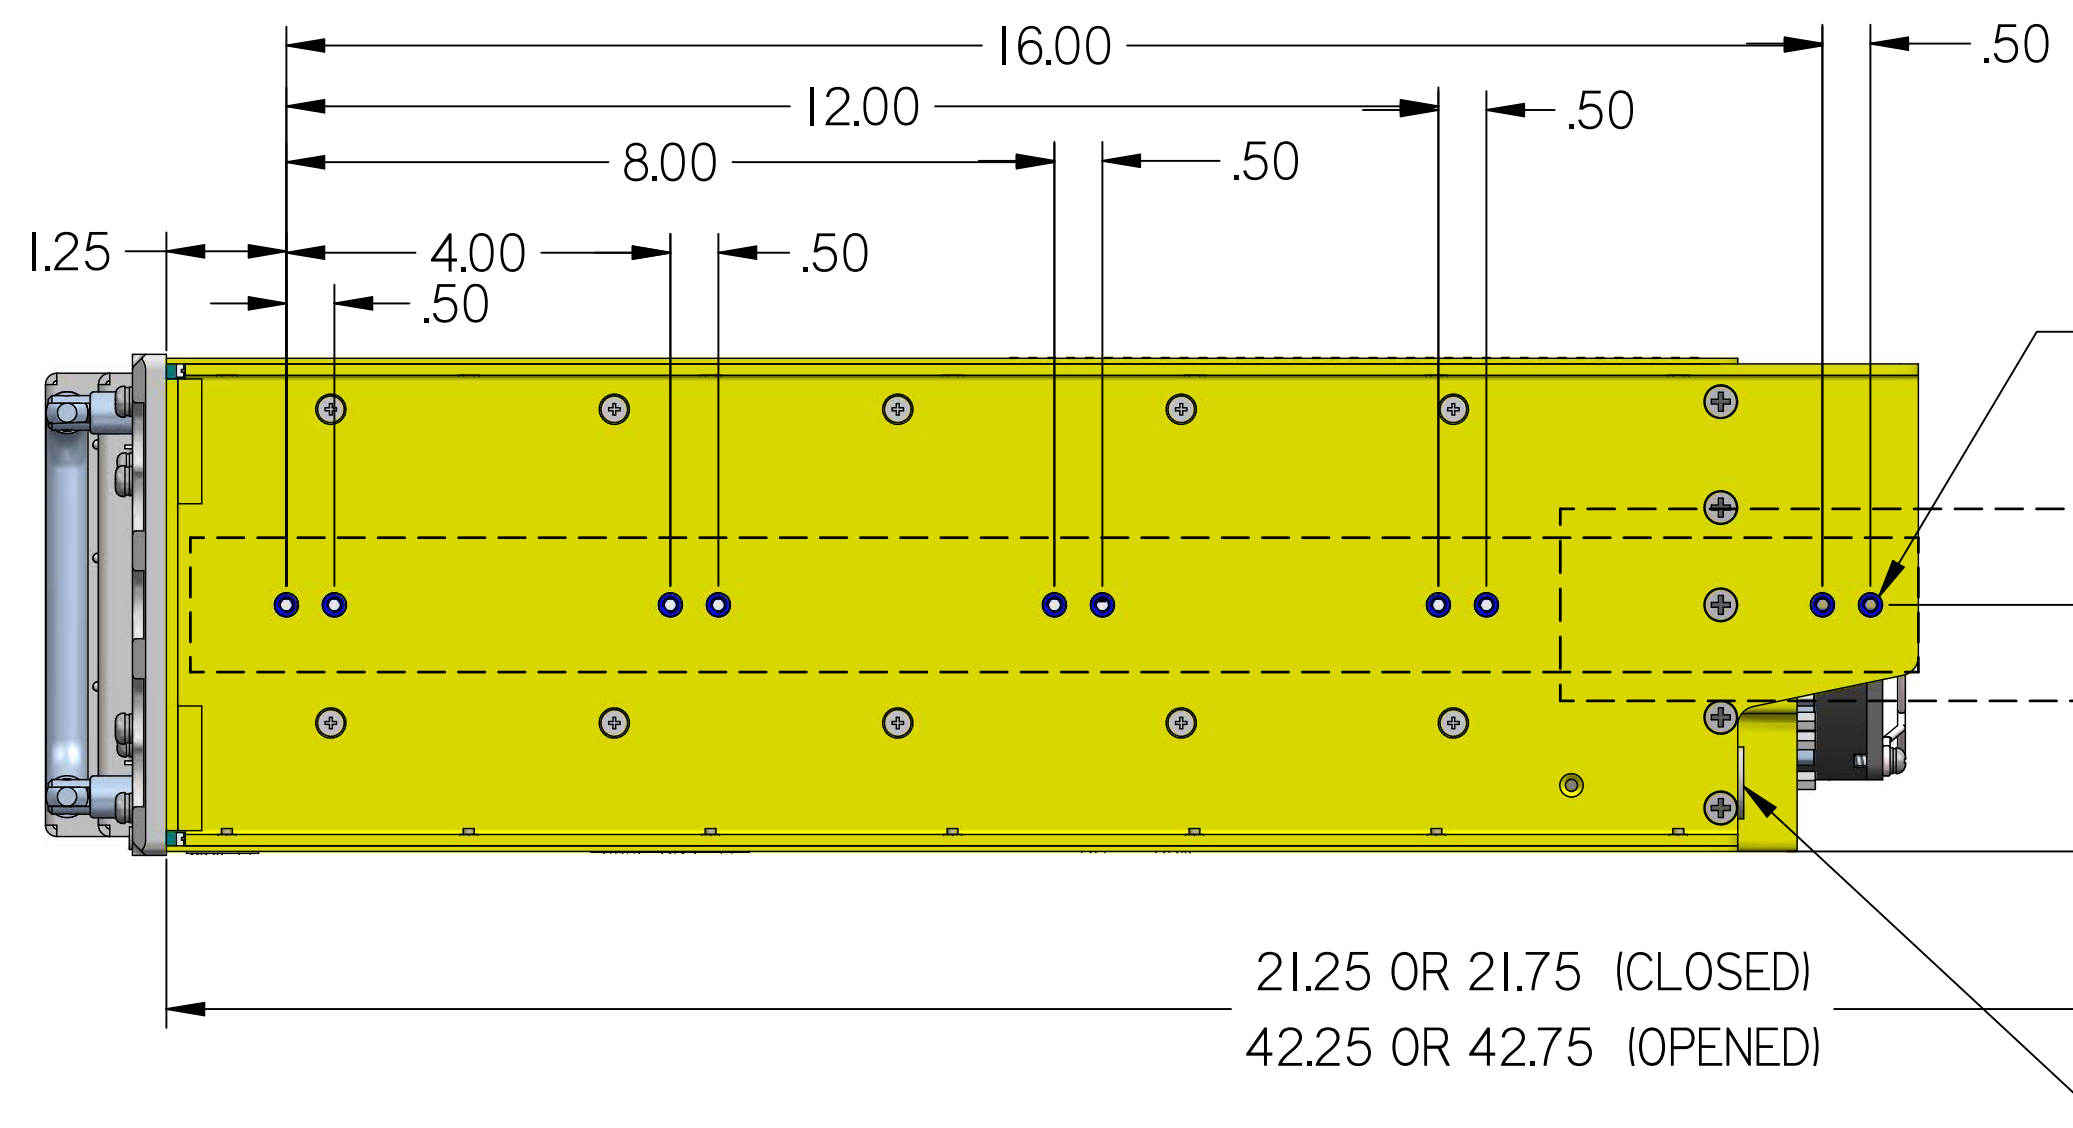


REVISIONS					
ZONE	ECN	REV	DESCRIPTION	DATE	APPROVED
	J9373	A	ECO. INC.	31.JAN.12	A.Y.
	R72554	B	ECO. INC.	31DEC.2025	E.S.

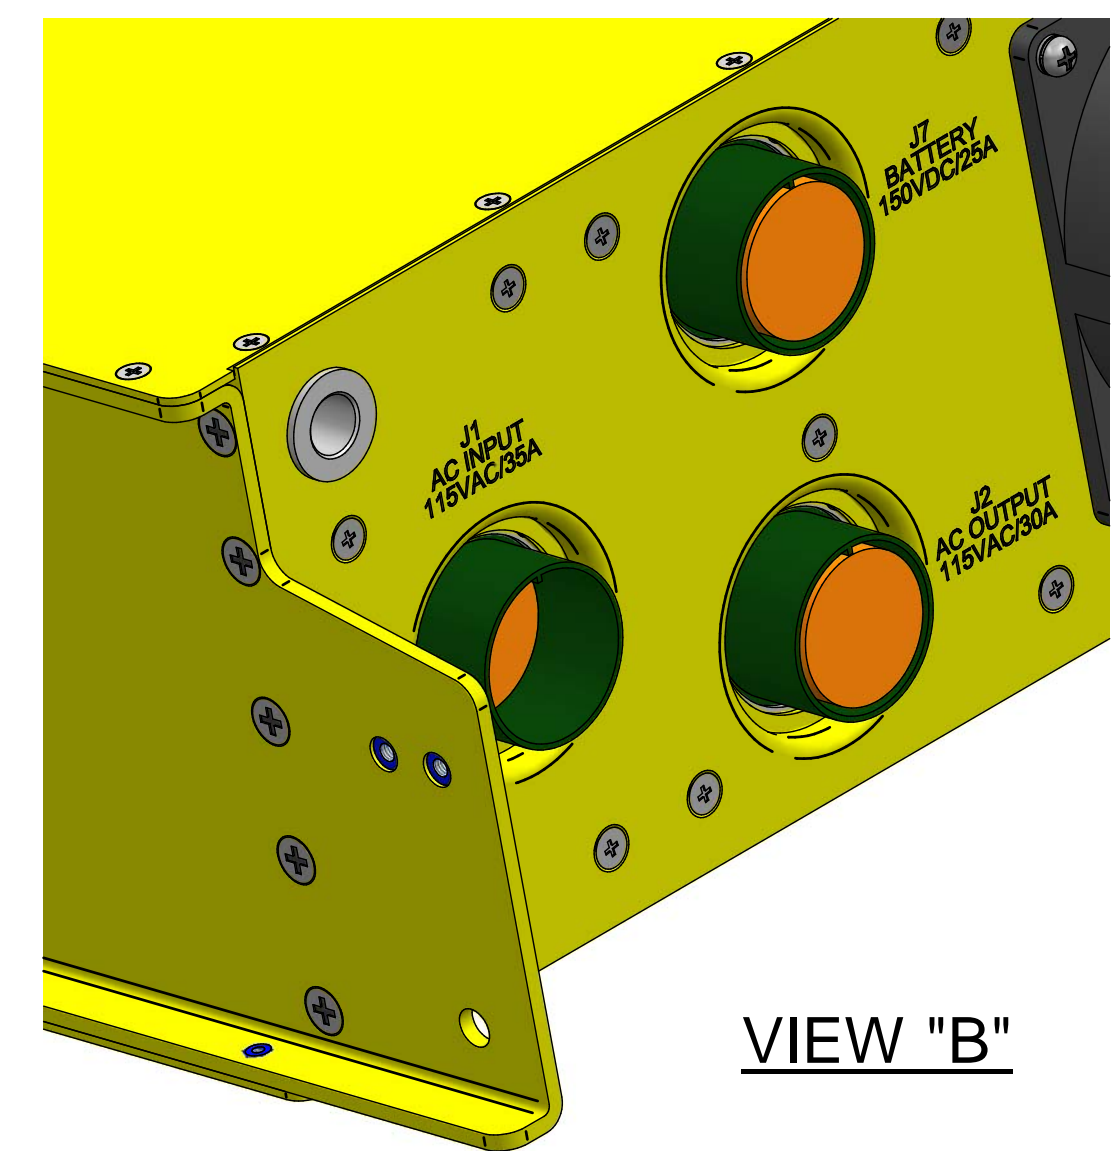

- J6 SNMP (INLET SIDE) RJ-45 (CAT5) IS USED ONLY IN M362-4-X-I-X-X
- J5 RS-232 D- TYPE 9S
- J4 REMOTE SWITCHES D-TYPE 15S
- J3 TO PDU D-TYPE 25S
- FAN PROTECT
- FAN (AIR OUTLET)
- J7 BATTERY I50VDC /25A MS3452L20-27S OR EQ.
- POLARIZING KEYWAY
- J2 AC OUTPUT I15V / 30A MS3452L20-22S OR EQ.
- J1 AC INPUT I15VAC / 35A MS3452L20-22P OR EQ.
- BUSHING ASSY . 2 PL. JONATHAN P.N. 1010-406 OR EQ. (SUPPLIED WITH PIN ASSEMBLY JONATHAN P.N. 1005-406 OR EQ.)

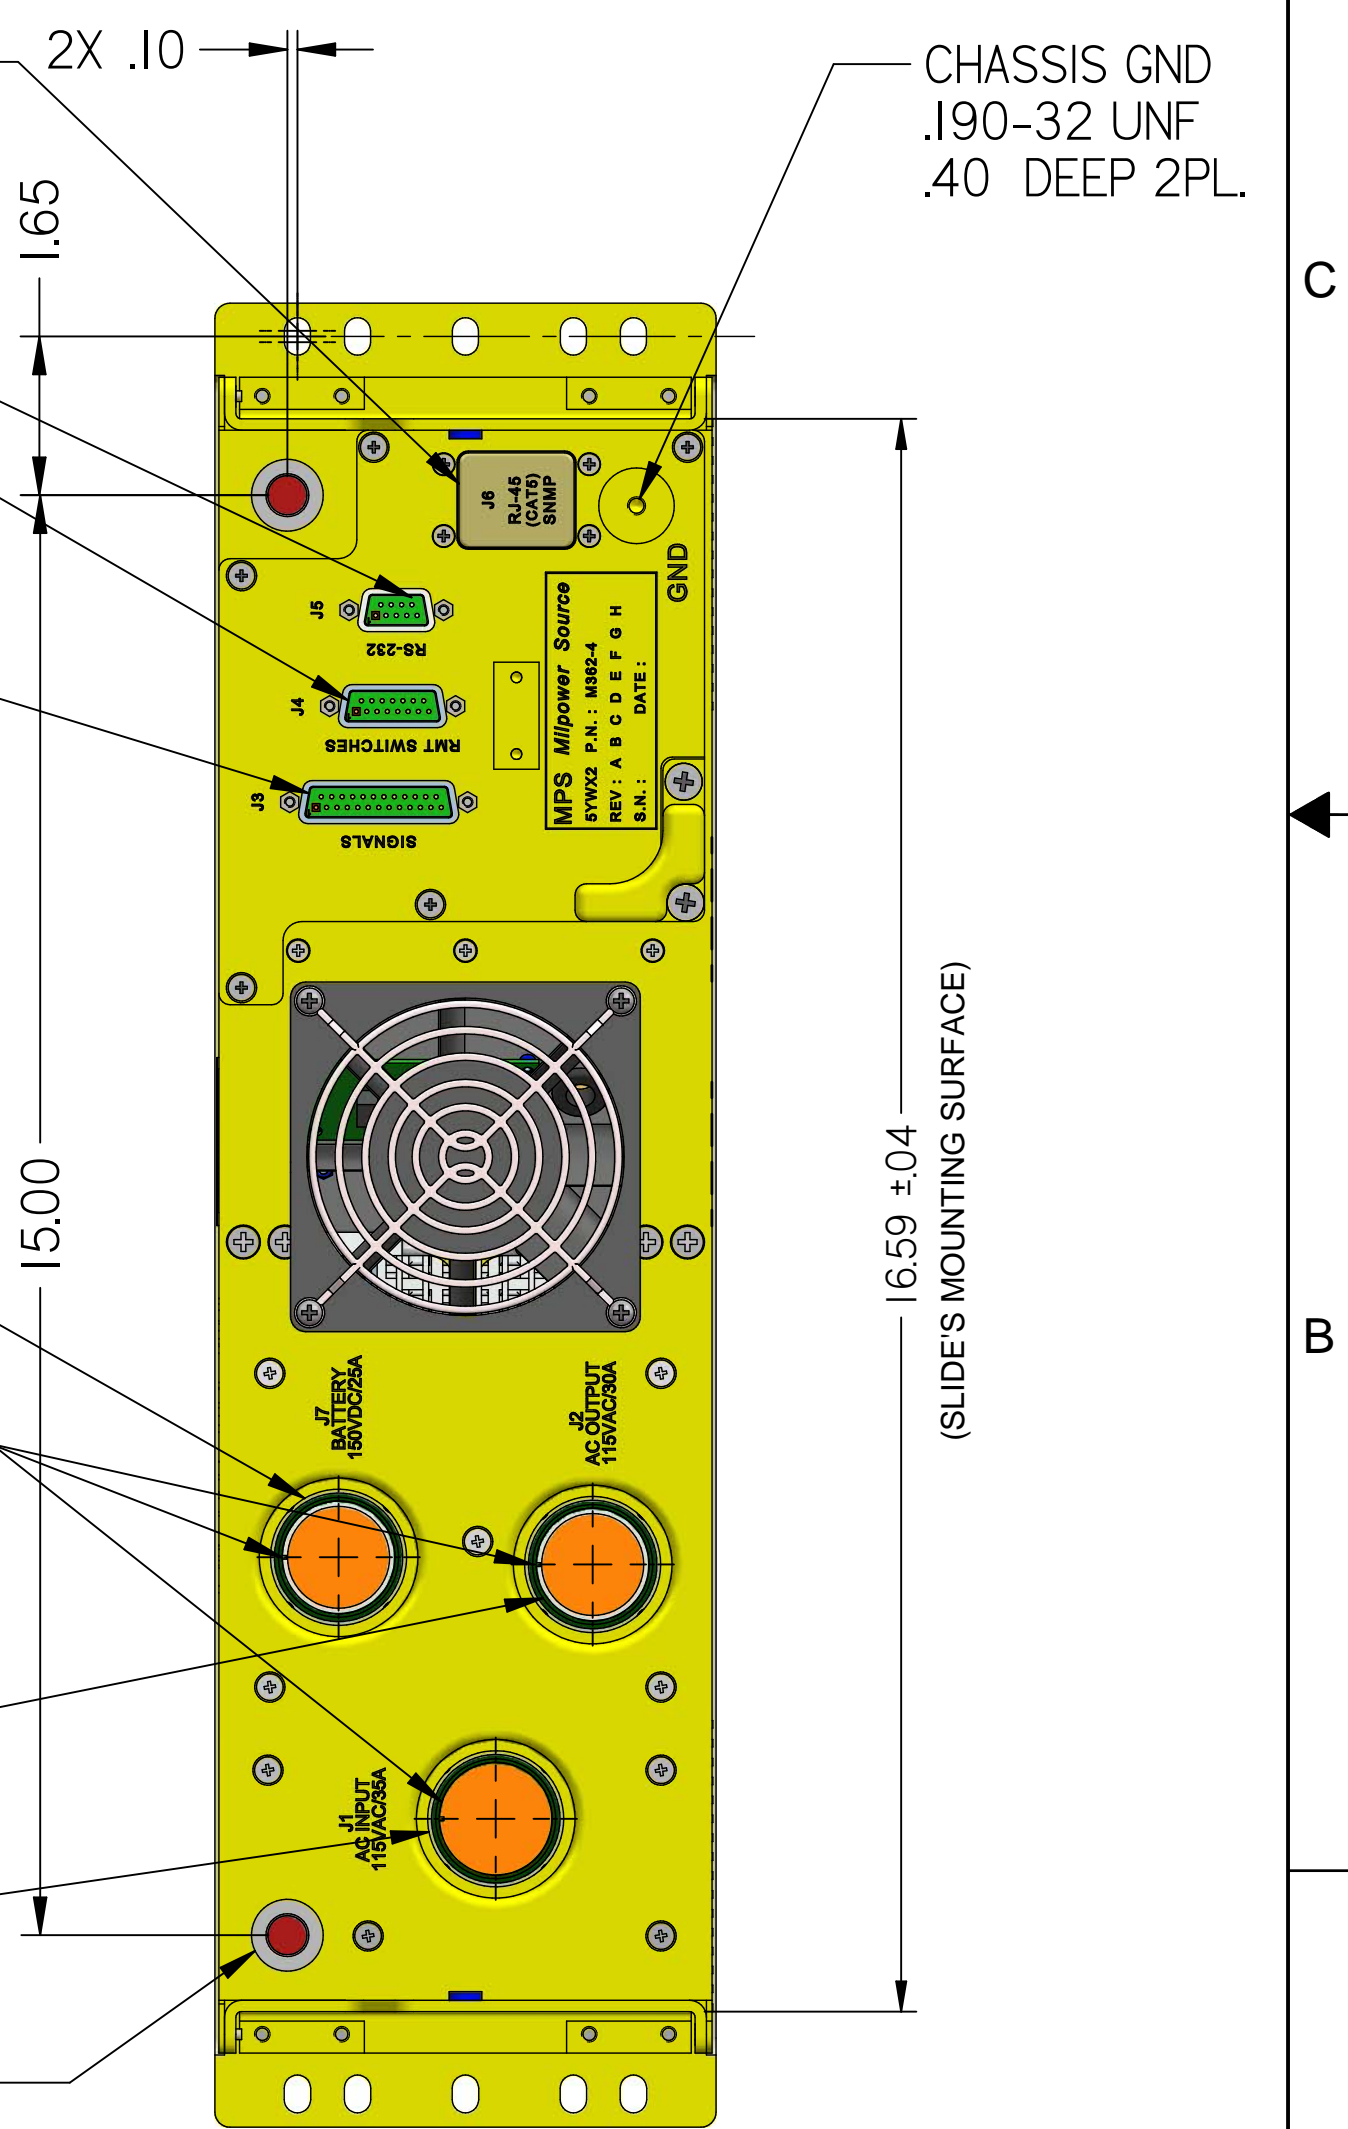

TOTAL WEIGHT INCLUDING SLIDES & PINS 90 POUND MAX.

COLOR (FRONT PANEL ONLY)
PRIMER: PER MIL-PRF-23377, TYPE I, CLASS N (NON-CHROMATE), 15-23 μM THICK.
TOP COAT: PER MIL-PRF-85285, TYPE I, CLASS H, SEMI-GLOSS, 26307 (GRAY) PER FED STD 595, 45-58 μM THICK.
TOTAL DRY THICKNESS: 60-81 μM

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCH. TOLERANCES ARE: DECIMALS .XXX ± .015 ANGLES ± 5</small> <small>X ± .8 .2XX ± .03</small> <small>DO NOT SCALE DRAWING</small>	SYSTEM PART NUMBER SCD000270		MPS MILPOWER SOURCE.	
	APPROVALS	DATE	TITLE	
	DRAWN E.S.	07OCT.10	UPS - OUTLINE DIMENSIONS	
CHECKED D.T.	21MAR.11	SIZE	CAGE CODE	DWG NO
APPROVED A.Y.	21MAR.11	D	5YWX2	M362004
		SCALE	1:2	SHEET
				1 OF 2

COMPUTER GENERATED DO NOT MANUALLY ALTER

4

3

2

1

Order PN: **M362-4 - 0 - 0 - 0 - 0**

Basic Part Number

Optional Special Hardware

-0 None (Std.)

Special Options

-0 None (Std.)

Optional Slides & Load Bearing Pins

-0 None (Std.)

-1 Pins and Slides:
Pins: Jonathan P/N 1005-406 or equivalent
(mate with the UPS back panel's bushings)
Slides: Actron P/N A5520-21 (or eq.)

-2 Pins only (same as -1).

Communication Port

-0 RS-232 (Std.)

-1 Ethernet SNMP (v1, v2 or v3),
instead of RS-232 (Consult
Milpower Source Sale)

D

D

C

C

B

B

A

A

4

3

2

1

SIZE C	CAGE CODE 5YWX2	DWG. NO. M362004	REV. B
SCALE NONE	SHEET 2:2		

COMPUTER GENERATED
DO NOT MANUALLY ALTER