


M7115 SERIES

DC/DC POWER SUPPLY

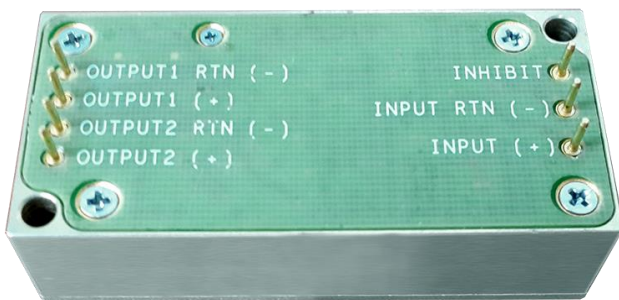

PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- DUAL OUTPUT
- DC/DC POWER SUPPLY
- UP TO 20 W

M7115 SERIES DC/DC POWER SUPPLY

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial Power Supply

Special Features

- Miniature size
- High efficiency
- Wide input range
- High Density – up to 11.5 W/in³
- Remote Inhibit (On/Off)
- Fixed switching freq. (~250 kHz)
- EMI filters included
- Input / Output isolation
- Non-latching protections:
 - Overload/Short-circuit
 - Over-voltage
 - Over temperature

Electrical Specifications

DC Input

Normal steady-state range:

- 18 to 70 V_{DC}

Normal over-voltage transients (operational) IAW:

- MIL-STD-1275A (100 V / 50 ms)
- MIL-STD-704A (80 V / 0.1 s)

Abnormal under-voltage transients (no damage, no operation): 14V / 0.6 s

Output Voltage Regulation

Up to ±1%

(no load to full load, –40 °C to +100 °C, and over input voltage range).

Internal Clock Frequency

Internal clock frequency is set to 250 kHz ± 10 kHz

DC Output

Output #1:

Voltage range: 1.5 to 48 V_{DC}

Current range: 0 to 3 A

Power range: 0 to 12 W

Output #2:

Voltage range: 1.5 to 48 V_{DC}

Current range: 0 to 1.5 A

Power range: 0 to 12 W

Ripple and Noise

Less than 100 mV_{p-p}, typical (max. 1%), measured across an external 0.1 μF capacitor with 20 MHz bandwidth.

Transient Over-and-undershoot

Output voltage change due to load transient of 30 to 90% with t_r & t_f of max 30 μs is up to 5% of nominal output voltage.

Output recovers to steady state voltage within less 2 ms.

Isolation

Input to Output: 200 V_{DC}

Input to Case: 200 V_{DC}

Output to Case: 100V_{DC} (Standard room temperature, 35 to 60% RH, 0 to 300 ft AMSL).

Efficiency

85% typical (28 V_{DC} input, 5 V_{DC} and 15 V_{DC} outputs, full loads, room temperature)

83% typical (full loads, –55°C to +85°C and over normal input voltage range)

M7115 SERIES DC/DC POWER SUPPLY

Electrical Specifications – continued

Turn-On Time

Output voltage reaches 90% of its nominal value within 50 ms from when input voltage rises above 20 V.

Turn-On Rise Time

Output voltage rise time from 10% to 90% of its nominal value during turn-on is up to 15 ms.

Turn-On Transient

Voltage overshoot during power on is less than 5% of nominal voltage.

EMC

Designed to meet MIL-STD-461F* : CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103

ESD

Complies with IEC-61000-4-2 level 4, 8 kV contact and 15 kV air discharge (Including pin injection when non-operational).

Protections **

Input

- **Under-Voltage Lock-Out**
Shutdown below 18 V ± 1 V.
Resume above 21 V ± 1 V.
Protection kicks in 7 ± 3 ms after onset of under-voltage event.
- **Over-Voltage Lock-Out**
Shutdown above 84 V ± 2 V.

Output

- **Passive Over-Voltage Protection**
Zener diode installed on output terminals. Zener threshold is 120% ± 10% of nominal voltage.
- **Overload Protection**
Output voltage turns off and on periodically with low duty-cycle (hiccup) when detecting overload or short circuit.

General

- **Over Temperature Protection**
Output shuts down if base plate temperature exceeds +105 °C ± 5 °C.
Automatic recovery when baseplate temperature returns to below +95 °C ± 5 °C.
Minimum hysteresis 10 °C.

Environmental Conditions

Designed to meet MIL-STD-810F

Temperature

Methods 501.4 & 502.4
Operating: -40 °C to +100 °C (at baseplate)
Storage: -55 °C to +125 °C

Humidity

Method 507.4
Procedure I
Up to 90% RH @ +35 °C
Up to 85% RH @ +40 °C

Altitude

Method 500.4
Procedures I & II
Up to 70000 ft. operational

Vibration (random)

Method 514.5
Category 4 - General minimum integrity exposure
IAW Figure 514.5C-17
1 hour per axis.

Salt Fog

Method 509.4

Shock

Method 516.5
Procedure I
20 g, 5 ms half-sine
10 g, 50 ms half-sine

Reliability

150,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground Fix environment.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

* EMC Compliance achieved with 5µH LISN, shielded harness and static resistive load. Depending on the actual configuration, an external filter may be required for full compliance.

** Thresholds and protections can be modified / removed – **please consult factory.**

Functions and Signals

INHIBIT signal

The **INHIBIT** signal is used to turn the power supply ON and OFF.


To turn the power supply ON, leave **INH** pin open.

To turn the power supply OFF, connect 28 V_{DC} IAW MIL-STD-704E (18 to 50 V) to **INH** pin.

If not used (always ON), leave this pin unconnected.


This signal is referenced to input voltage return (**VINRTN** pin)

Typical Connection Diagram

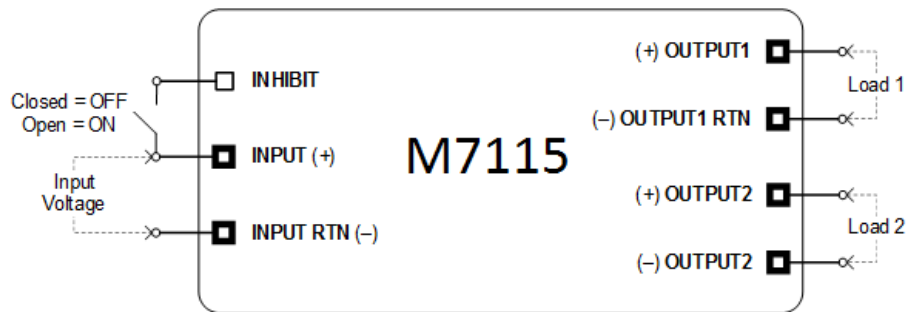

M7115 SERIES DC/DC POWER SUPPLY

Outline Drawing

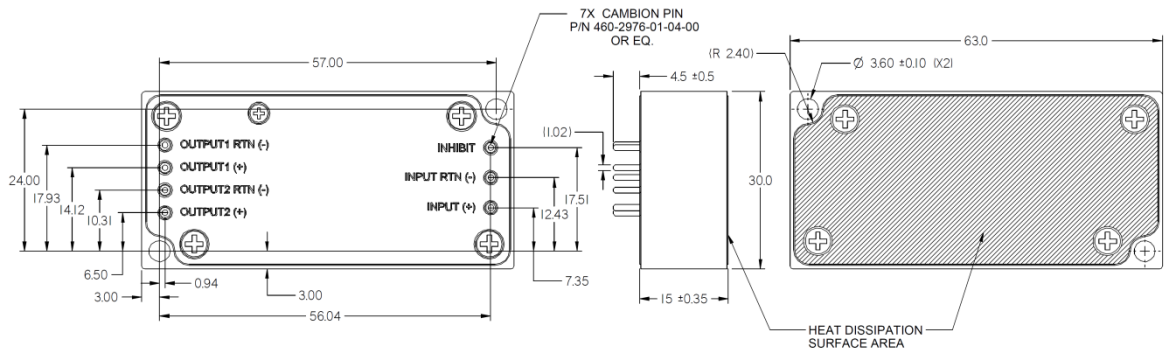

Notes

1. Dimensions are in mm
2. Tolerance is:
.X ± 0.25 mm
.XX ± 0.2 mm
3. Weight: 50g typical

Note: Specifications are subject to change without prior notice by the manufacturer