


M8149 SERIES

DC/DC POWER SUPPLY

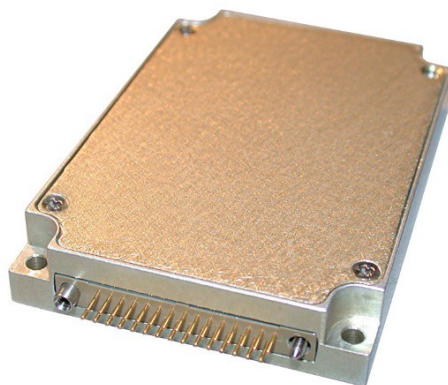

PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- QUAD OUTPUT
- UP TO 60W



APPLICATIONS

Military, Ruggedized, Telecom, Industrial

SPECIAL FEATURES

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 kHz)
- TTL logic enable
- EMI/RFI filters included
- Indefinite short circuit protection with auto-recovery
- Input over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

ENVIRONMENTAL

Meets or exceeds MIL-STD-810D

Temperature:

Operating -55°C to $+85^{\circ}\text{C}$ (baseplate)

Storage -55°C to $+125^{\circ}\text{C}$

RELIABILITY

150,000 hours, calculated per

MIL-STD-217F at $+85^{\circ}\text{C}$ baseplate, ground fixed.

Note: Specifications are subject to change without prior notice by the manufacturer

ELECTRICAL SPECIFICATIONS

DC INPUT

DC Input range: 18 to 48 VDC

Input transient protection:

All modules meet or exceed (no damage)

MIL-STD-1275A (100V for 50 mSec) and

MIL-STD-704A, MIL-STD-704D (80V for 0.1 Sec)

Over-voltage shutdown with auto-recovery

Efficiency: Up to 80%

EMC:

Designed to meet MIL-STD-461F*

CE101, CE102, CS101, CS114, CS115,

CS116, RE101, RE102, RS101, RS103

Isolation:

200V between Input and Output

200V between Input and Case

DC OUTPUT (floating)

Line/Load regulation:

Less than $\pm 2\%$ (no load to full load, -55°C to $+85^{\circ}\text{C}$)

Ripple and Noise: 50mVp-p, typical (max. 1%)

Current limiting:

Continuous protection for unlimited time

Over voltage protection:

Passive tranzorb on output.

Over temperature protection:

Shutdown at baseplate temperature of $+100^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Automatic recovery at baseplate

temperature lower than $+90^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Isolation:

200V between Output and Input

100V between Output and Case

* EMC compliance achieved when tested with 5 μH LISNs, shielded harness and static resistive load.

Functions and Signals

INHIBIT

The ***INHIBIT*** signal is used to turn the power supply ON and OFF.
TTL "1" or OPEN – Power supply is ON (For normal operation, leave this pin unconnected.) TTL "0" or SHORT to ***SIGNAL RTN*** – Power supply is OFF.

SYNC

The ***SYNC*** signal is used to allow the power supply's switching frequency to sync with the system clock. The external clock's frequency can be $250 \text{ kHz} \pm 10 \text{ kHz}$.
When this pin is left open (unconnected) the power supply will synchronize to its internal clock, set at $250 \text{ kHz} \pm 10 \text{ kHz}$.

SIGNAL RTN

The ***SIGNAL RTN*** is used as a return path for the ***SYNC*** and ***INHIBIT*** signals. This pin is referenced to ***VIN RTN***.


PIN ASSIGNMENT

PIN No.	PIN Function
10, 11, 24, 25, 26	+ VIN
7, 8, 9, 22, 23	VIN RTN
29, 30	+ OUT 1
14, 15	- OUT 1
4, 19	+ OUT 2

PIN No.	PIN Function
3, 18	- OUT 2
12, 27	+ OUT 3
13, 28	- OUT 3
5, 20	+ OUT 4
6, 21	- OUT 4

PIN No.	PIN Function
16	SYN IN
17	SIGNAL RTN
1	INHIBIT
2	CHASSIS

OUTLINE DRAWING

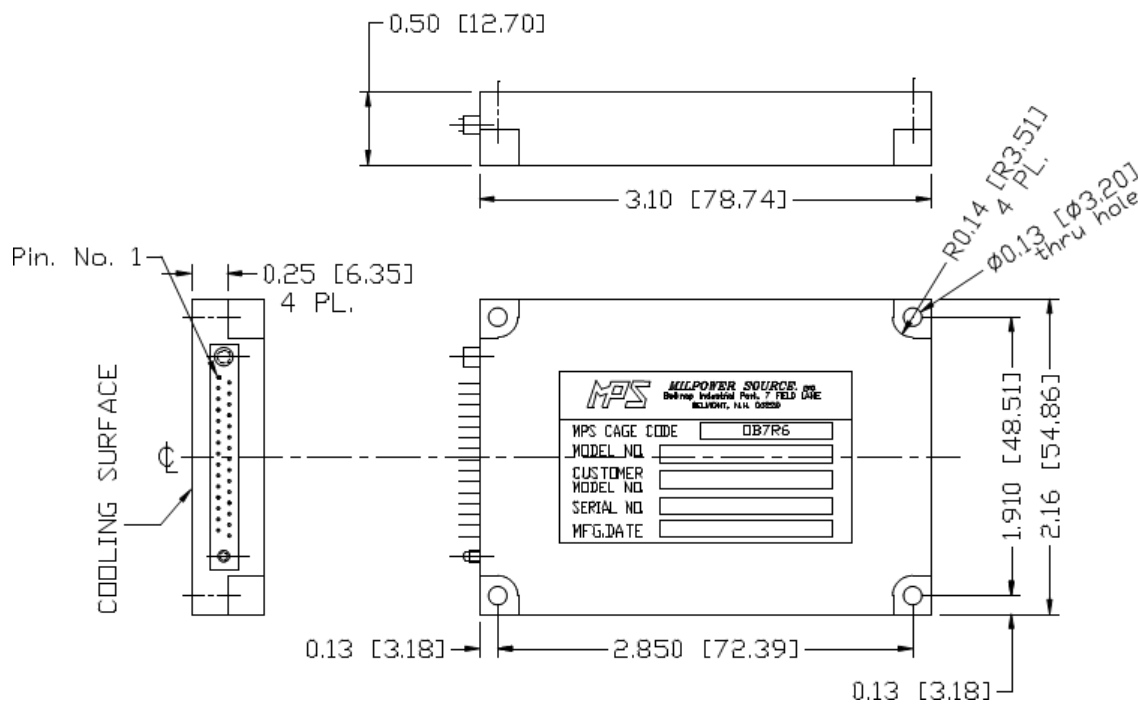

Connector Type: RM272-030-312-2900 or Eq.

Notes

1. Dimensions are in Inches [mm]
2. Tolerance is:
 .XX ± 0.01IN
 .XXX ± 0.005 IN
3. Weight: Approx. 3.5 oz (100 g.)

Note: Specifications are subject to change without prior notice by the manufacturer