

## M8253 SERIES

DC/DC POWER SUPPLY



### PRODUCT HIGHLIGHTS

- **MINIATURE**
- **HIGH DENSITY**
- **DUAL OUTPUT**
- **DC/DC CONVERTER**
- **UP TO 200W**

### **Applications**

Military, Ruggedized, Telecom, Industrial Power Supply

### **Special Features**

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 kHz)
- External synchronization capability
- TTL logic enable
- EMI filters included
- Non-latching protections:
  - Overload/short-circuit
  - Input under/over lockout
  - Over temperature

### **Environmental Conditions**

Meets or exceeds MIL-STD-810D

#### Temperature:

Operating:  $-55\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$   
(baseplate)

Storage:  $-55\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$

### **Reliability**

At least 150,000 hours  
calculated IAW MIL-HDBK-217F  
at  $+85\text{ }^{\circ}\text{C}$  baseplate, ground fix  
conditions.

### **Electrical Specifications**

#### **DC INPUT**

Normal voltage range: 18 to 48 V<sub>DC</sub>

#### Abnormal transient protection:

No damage (may shut down and  
restart)

IAW MIL-STD-1275A (100 V / 50 ms)  
and

MIL-STD-704A (80 V for 0.1 s)

Efficiency: up to 87%

EMC: Designed to meet\* MIL-STD-461F

CE101, CE102, CS101, CS114, CS115,  
CS116, RE101, RE102, RS101, RS103

#### Isolation:

Input to Output: 200 V<sub>DC</sub>

Input to Case: 200 V<sub>DC</sub>

#### **DC OUTPUT (floating)**

Voltage regulation: Up to  $\pm 1\%$  (no load  
to full load,  $-55\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ )

Ripple and Noise: 50 mV<sub>p-p</sub>, typical  
(max. 1%)

#### Current limiting (Hiccup):

Continuous protection for unlimited  
time

#### Over voltage protection:

Secondary active protection and passive  
transorb on outputs.

#### Over temperature protection:

Shutdown if baseplate temperature  
exceeds  $+105\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ . Automatic  
recovery upon cooldown to below  
 $+95\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$

#### Isolation:

Output to Case: 100 V<sub>DC</sub>

---

\* Compliance achieved with 5 $\mu$ H LISN, shielded harness and static resistive  
load.

**Pin Assignment**

**Connector type:** M55302/61-A36 or eq.

**Mating connector type:**

- M55302/65-36S (removable crimp pins, turning jacket)
  - M55302/65-36H (removable crimp pins, hex turning jacket)
- (other possibilities exist)

Pin No.	Function
9, 10, 27, 28	INPUT
11, 12, 29, 30	INPUT RTN
8	SIGNAL RTN *
6	SYNC
7	INHIBIT
13, 14, 15, 16, 33	OUT1
17, 18, 34, 35, 36	OUT 1 RTN
32	OUT 1 SENSE
31	OUT 1 SENSE RTN
1, 2, 19, 20, 21	OUT 2
3, 4, 5, 22, 23	OUT 2 RTN
25	OUT 2 SENSE
24	OUT 2 SENSE RTN
26	CHASSIS

---

\* INHIBIT and the SYNC signals are referenced to SIGNAL RTN.

### ***Functions and Signals***

#### **INHIBIT signal**

The **INHIBIT** signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply (For normal operation leave the signal not connected).

TTL “0” – will turn off the power supply.

#### **SYNC signal**

The SYNC signal is used to allow the power supply frequency to sync with the system frequency.

The system frequency can be 250 kHz  $\pm$  10 kHz.

When not connected, the power supply will work at internal frequency, close to 250 kHz  $\pm$  10 kHz.

#### **SIGNAL RTN**

The **SIGNAL RTN** is used as grounding for **SYNC** and **INHIBIT** signals.

This is referenced to the **INPUT RTN** pin.

#### **SENSE #**


The **SENSE #** is used to achieve accurate load regulation at the load terminals. This is done by connecting these pins directly to their respective load terminals. The use of remote sense has a limit of voltage dropout between converter’s output and load terminals of 2-10% of voltage output.

When not used connect **SENSE #** to **OUT #** and **SENSE # RTN** to **OUT # RTN** for each of the outputs.


#### **CHASSIS**

This chassis pin allows connection of the unit chassis to system chassis.

*Typical Connection Diagram*

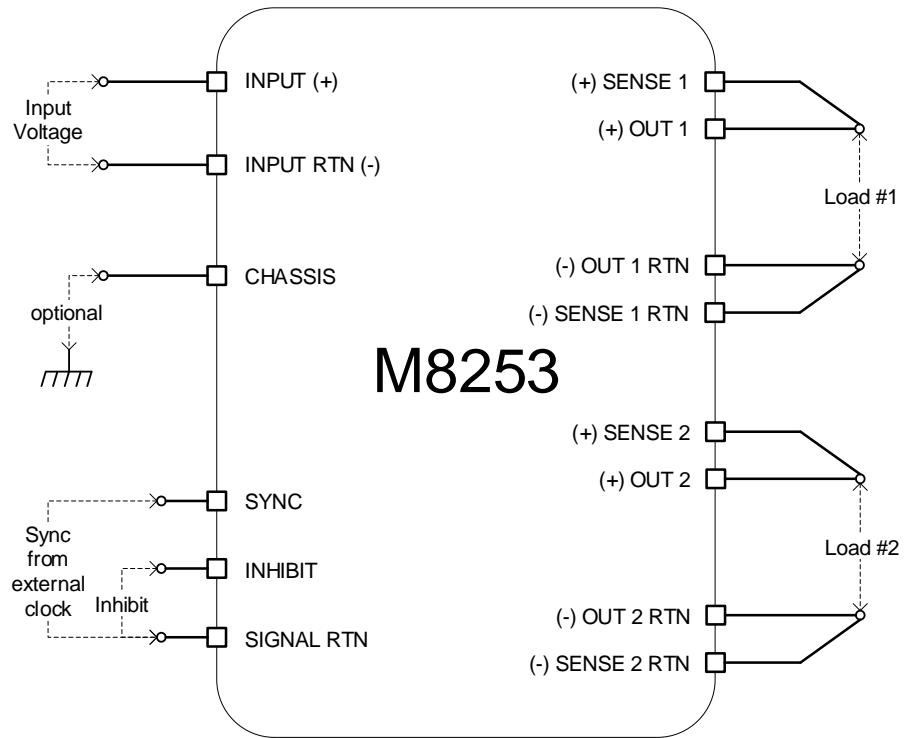

**Outline Drawing**

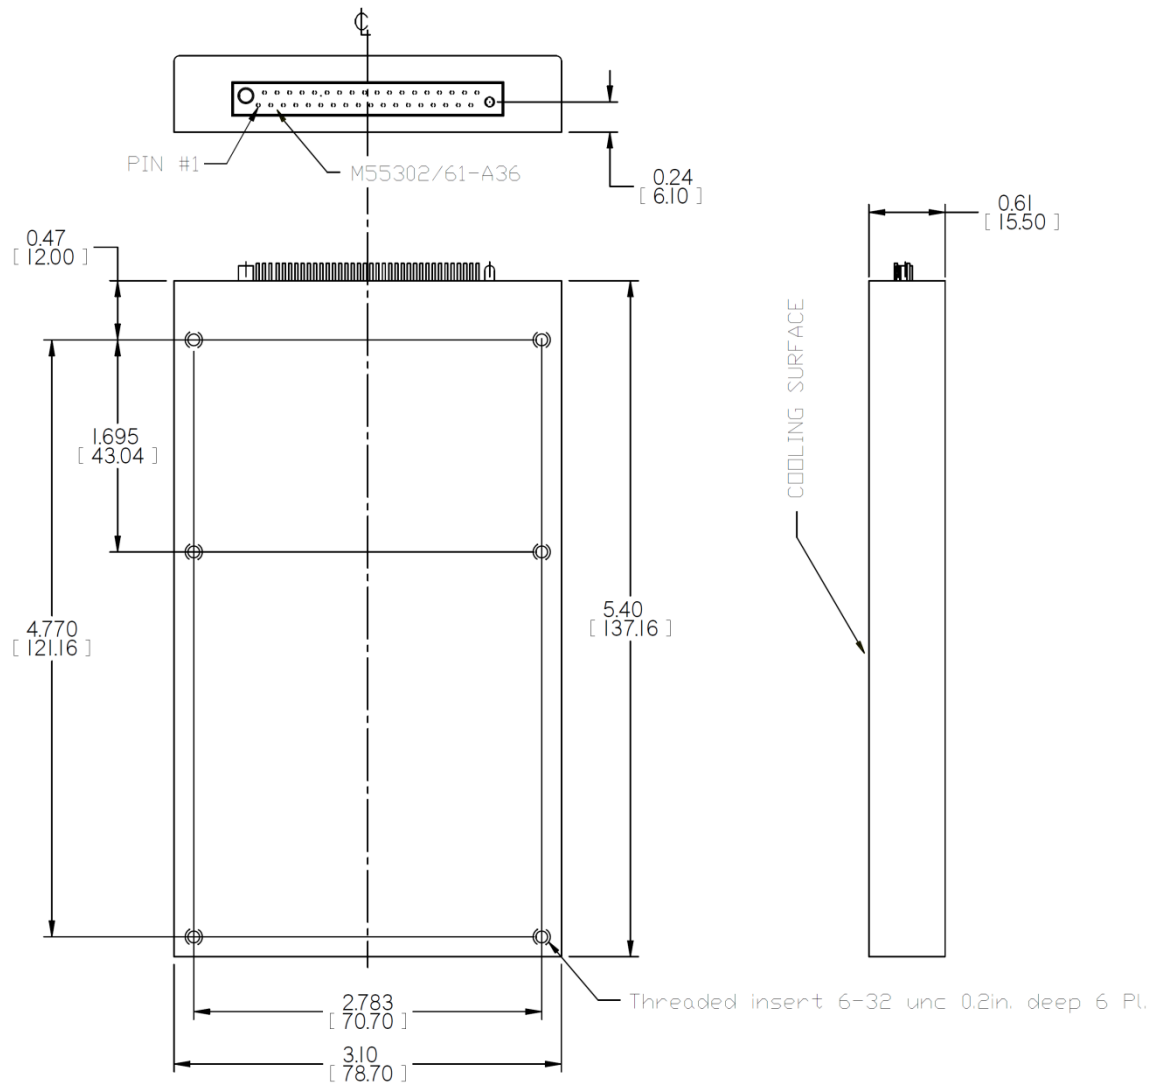

**Notes**

1. Dimensions are in Inches [mm]
2. Tolerance is:  
     .XX ± .02 in  
     .XXX ± .01 in
3. Weight: Approx. 10.23 ± 0.35 oz (290 ±

**Note: Specifications are subject to change without prior notice by the manufacturer**